


SALVAGE & RESCUE TUG



SALVAGE & RESCUE TUG - 180 t BP

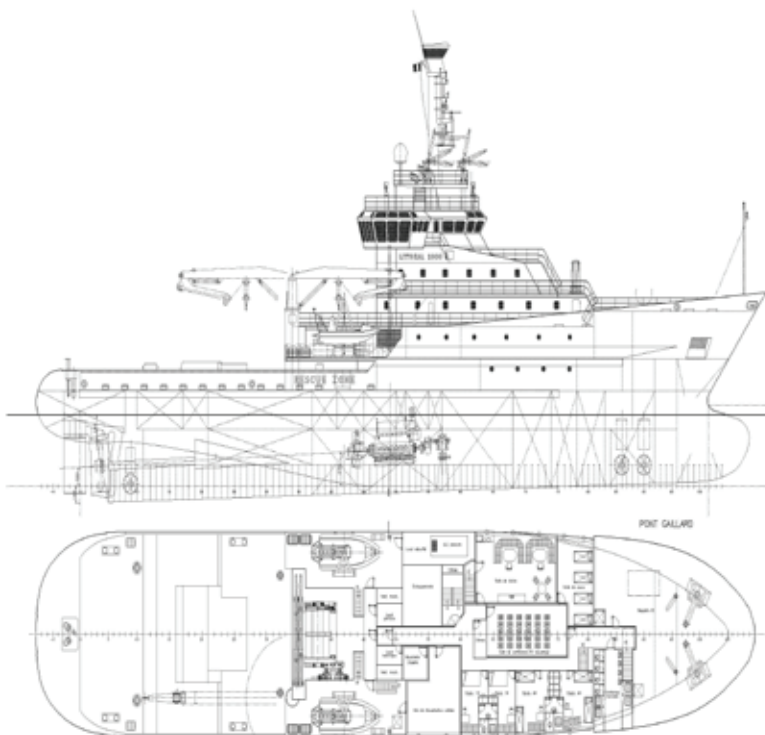

Deep sea tug designed for intervention, assistance and rescue

- 180 tons bollard pull
- Fire-fighting, anti-pollution, assistance and rescue equipment
- 19 knots

SALVAGE & RESCUE TUG

SALVAGE & RESCUE TUG - 180 t BP

MAIN CHARACTERISTICS

Length overall	78.9 m
Breadth	16.0 m
Depth on main deck	7.5 m
Fuel capacity	1600 m ³
Fresh water	55 m ³
Crew	25
Speed	19 kn
Bollard pull	180 t
Hull / Superstructure	steel

SPECIAL EQUIPMENT

Waterfall type aft winch

Waterfall drums	2 x 1600 m wire - Ø 76 mm
Break load	500 t

Tugger winch

Pendants storage winch

Spare towing reel

Fire-fighting system

Pumps	2 x 4000 m ³ /h
Monitors	3 x 2400 m ³ /h
Waterspray system	

CLASSIFICATION

Bureau Veritas
I ⚡ HULL ⚡ MACH
Tug
Unrestricted navigation
Fi-Fi 2
Water spraying
AUT-UMS
DYNAPOS AM

MISCELLANEOUS EQUIPMENT

Transversal thrusters

Fore thrusters	2 x 500 kW
Stern thruster	1 x 500 kW

Anchoring

Hydraulic windlasses	2
Anchors	3 x 2460 kg

PROPULSION / MACHINERY

Propulsion

Diesel engines	2 x 3840 kW - 600 rpm 2 x 2880 kW - 600 rpm
Twiner gearboxes	2
Propellers	2 x Ø 4.0 m under nozzle

Machinery

Gensets	2 x 600 kVA
Driven generators	2 x 2000 kVA